

Abstract

The topologically protected magnetic spin configurations known as skyrmions offer promising applications due to their stability, mobility and localization. In this work, we emphasize how to leverage the thermally driven dynamics of an ensemble of such particles to perform computing tasks. We propose a device employing a skyrmion gas to reshuffle a random signal into an uncorrelated copy of itself. This is demonstrated by modelling the ensemble dynamics in a collective coordinate approach where skyrmion-skyrmion and skyrmion-boundary interactions are accounted for phenomenologically. Our numerical results are used to develop a proof-of-concept for an energy efficient ($\sim \mu\text{W}$) device with a low area imprint ($\sim \mu\text{m}^2$). Whereas its immediate application to stochastic computing circuit designs will be made apparent, we argue that its basic functionality, reminiscent of an integrate-and-fire neuron, qualifies it as a novel bio-inspired building block.

Skyrmion Gas Manipulation for Probabilistic Computing

D. Pinna^{*1}, F. Abreu Araujo¹, J.-V. Kim², V. Cros¹, D. Querlioz²,
P. Bessiere³, J. Droulez³ and J. Grollier¹

¹Unité Mixte de Physique CNRS, Thales, Univ. Paris-Sud, Université
Paris-Saclay, 91767 Palaiseau, France

²Centre for Nanoscience and Nanotechnology, CNRS, Univ.
Paris-Sud, Université Paris-Saclay, 91405 Orsay, France

³Institut des Systèmes Intelligents et de Robotique, Université Pierre
et Marie Curie, Paris, France

1 Introduction

Magnetic skyrmions promise unique opportunities for the processing, storage and transfer of information at the intersection of both spintronics and nanoelectronics [1, 2, 3, 4, 5, 6]. The experimental verification of skyrmion spin configurations has been a forefront research topic in magnetism over the past decade. Initially observed in bulk non-centrosymmetric crystal lattices [7, 8, 9, 10, 11], they have been more recently stabilized in ultrathin ferromagnetic nanostructures strongly affected by the Dzyaloshinski-Moriya interaction (DMI) resulting from coupling to a heavy metal substrate [12, 13]. In such materials, skyrmions are exceptionally stable spin textures capable of enduring room-temperature environments [14, 15, 16, 17] and manipulable at small current densities ($10^6 - 10^{11}$ A/m²) [18, 19, 16, 20, 21]. Furthermore, their topological resilience [22, 2] allows them to avoid pinning onto defects [23, 24] and guarantees particle number conservation under a wide range of operating conditions [25, 26].

The appeal of skyrmions is so wide that it has defined a field of its own, skyrmionics, which refers to the emerging technologies based on magnetic skyrmions as information carriers. In an effort to push for skyrmion-based electronics, challenges ranging from their creation and annihilation [2, 27, 28], the conversion of their topological properties [5, 29], as well as their efficient

^{*}dpinna@protonmail.com

transmission and read-out [2, 4, 3, 30, 6] are being tackled and solved. Recently, proposals have exploited their nano-metric size and high mobility [31, 24, 19, 1] in the context of skyrmion-based racetrack memories [3, 27, 32], logic gates [5], voltage-gated transistors [33] and synaptic devices [34].

All such applications effectively employ geometries where one or more skyrmions are injected, manipulated and read out (see Fig. 1). Currently, the standard approach for studying their behavior is to employ micromagnetic simulations capable of modeling the nonlinear evolution of the structure’s magnetic texture over time [35]. Whereas micromagnetic techniques can be very precise, the execution time of the finite-difference method they employ scales rapidly with the volume of the structure itself [36]. As such, resolving the behavior of large structures and circuits over long time periods becomes impractical even on the nanoscale. It is therefore important to have an efficient method for simulating the behavior of skyrmion ensembles which scales with the number of skyrmions instead. Such a technique should be capable of capturing both the influence of magnetic dipole effects as well as boundary interactions on the ensemble dynamics.

At a device level, skyrmionic applications are not *currently* expected to compete significantly with present-day CMOS implementations of boolean logic circuits whose strengths lie in the accuracy and precision of bitwise operations. However, limits in the exponential miniaturization of transistor-based architectures exposes bottlenecks both with regards to speed as well as power consumption. This is particularly relevant when requiring for hardware to enable software capable of performing fast inference over large amounts of data. As an example, much attention has been directed towards the development of artificial neural networks for the execution of deep-learning techniques [37]. Such solutions typically seek to draw inspiration from the probabilistic and massively parallel nature of biological information processing [38] whose virtues have been explored for the past half century [39]. In this context, we propose that greater focus should instead be given to the use of skyrmions as basic elements in the design of probabilistic device architectures. By leveraging skyrmion number conservation, thermal susceptibility and ultra-low power transport properties, we believe that a fertile route towards disruptive applications can be achieved. Along this line, our work presents two novel devices implementing basic building blocks for probabilistic computing.

Starting from the collective coordinate dynamical theory introduced by Thiele [40], this paper first develops an N-body framework capable of modelling the dynamics of skyrmion ensembles within their geometries and successively demonstrate how they may be employed to perform probabilistic computing. In Section 2, we use micromagnetic simulations to characterize the repulsive skyrmion-skyrmion and skyrmion-boundary interactions. These then enter phenomenologically into the N-body Thiele model where the ensemble dynamics become solvable out to long timescales. These ad-

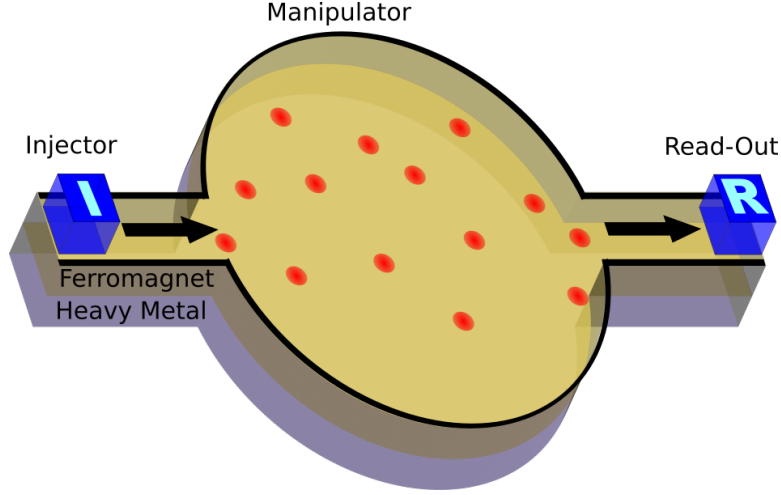


Figure 1: Bare-bones schematic of a generic skyrmionic device constructed with a thin film ferromagnet/heavy metal bilayer. One or more skyrmions are injected into the geometry where manipulation occurs before readout.

vantages permit us in Section 3 to show how a very compact device can be modelled for the reshuffling of stochastic telegraph noise signals and random number generation. Finally, in Section 4, we argue how our skyrmion reshuffler, subject to trivial modifications, can serve a much more general purpose by effectively working as an analog integrate-and-fire neuron [41]. These results lay the groundwork for the application of skyrmionic devices as bio-inspired building blocks for non-conventional computing strategies.

2 Model

2.1 Isolated Skyrmion Dynamics

The motion of an isolated skyrmion in a two dimensional film can be described by a modified version of Newton's equation which tracks the coordinate evolution of the skyrmion's center. Assuming translational invariance of the skyrmionic spin texture, the *Thiele*-equation of motion can be used [42, 43, 40, 4]:

$$\hat{\mathbf{G}}^\alpha \cdot \dot{\mathbf{x}} = \mu \hat{\mathbf{G}}^\eta \cdot \mathbf{v}_s + \mathbf{F}_{\text{Th}} + \mathbf{F}_{\text{Ext}} \quad (1)$$

$$\hat{G}_{ij}^\sigma = G \epsilon_{ij} + \sigma D \delta_{ij} \quad (2)$$

where $\hat{\mathbf{G}}$ is the gyrotropic matrix, ϵ_{ij} the Levi-Civita tensor, δ_{ij} a Kröneckers delta, and σ is equal to either the damping constant α (when referring to the left side of (1)) or a parameter η characterizing both the net ratio of

adiabatic and non-adiabatic spin-torque intensities as well as the ratio of damping-like to field-like torques depending on the geometries of current injection. Doing so, our model is general enough to capture equally well the skyrmion driving motion originating from both spin-torques due to in-plane currents as well as spin-orbit torques arising from the substrate heavy metal layer [44, 24, 45]. Lastly, the parameter μ models the net intensity due to the combination of these two driving effects. Time is in units of γM , where γ is the gyromagnetic ratio and M the magnetic texture's local moment magnitude. Under the assumption of an invariant skyrmion profile, the gyrotropic matrix (2) is composed by the gyrovector G , a topological invariant arising from the *twist* in the spin-texture, and the dissipative diadic D (also known as the *gyrodamping*) which, together with α , characterizes the net friction acting on the skyrmion [44, 43, 46, 47, 40]. Both are typically computed explicitly from the static magnetic profile:

$$G = \int d\mathbf{r} \, \mathbf{n} \cdot (\partial_x \mathbf{n} \times \partial_y \mathbf{n}) \quad (3)$$

$$D = \int d\mathbf{r} \, (\partial_x \mathbf{n} \cdot \partial_x \mathbf{n} + \partial_y \mathbf{n} \cdot \partial_y \mathbf{n}) / 2, \quad (4)$$

where $\mathbf{n}$ is the local, unit-normalized, magnetization orientation. A very convenient property of both terms is that they do not scale with the skyrmion's size as long the skyrmion is larger than a few times the domain wall width $\sqrt{A_{ex}/K_u}$. This ensures that their values computed in zero-temperature micromagnetic simulations will also be valid when modelling finite-temperature skyrmions. Thermal effects are known in fact to excite breathing modes in the skyrmion profile which imply a periodic fluctuation in the skyrmion size [48]. These are expected to qualitatively alter the dynamics of large skyrmions ($\sim 200\text{nm}$) where second order inertial terms should be included in the respective Thiele model [47, 49]. For the physical parameters chosen in our simulations (see Methods), we find stable isolated skyrmions with a typical diameter of $\sim 60\text{nm}$.

The three force terms appearing on the right side of (1) model various interactions that dynamical skyrmions are subject to. Both the conduction of electrons through the spin-texture and the pumping of spin through spin-orbit-torque effects are known to induce both an adiabatic and non-adiabatic spin-torque [50] (usually referred as damping-like / field-like spin-torques when spin orbit torques are considered) giving rise to well-defined force components acting on the skyrmion profile [51, 42]. These current-induced drift effects are captured by the first term where $\mathbf{v}_s$ is the spin-drift velocity (directly proportional to current density j). In the special case where $\eta = \alpha$, skyrmions drift along the current flow lines. In all other circumstances, however, the discrepancy between α and η leads to current-induced skyrmion flows which proceed at an angle to the current-flow driving

them [3, 20].

Similarly, the thermal forces are modelled by the collective action of independent random magnetic fields acting on the texture's local magnetic moments. The net effect results in an additive, homogeneous mean-zero stochastic term to the Thiele dynamics [52]:

$$\langle \mathbf{F}_{\text{Th}} \rangle = 0 \quad (5)$$

$$\langle F_{\text{Th},i}(t) F_{\text{Th},j}(t') \rangle = \frac{k_B T}{\gamma M} \frac{\alpha D}{G^2 + (\alpha D)^2} \delta_{i,j} \delta(t - t'), \quad (6)$$

where $k_B T$ is the thermal energy and $\langle \cdot \rangle$ represents averaging over noise realizations.

The remaining term, which we now proceed to discuss in detail, seeks to model all repulsive interskyrmion interactions and boundary effects:

$$\mathbf{F}_{\text{Ext}} = \mathbf{F}_S + \mathbf{F}_B, \quad (7)$$

where $\mathbf{F}_S$ and $\mathbf{F}_B$ are, respectively, skyrmion-skyrmion and boundary repulsion terms.

2.2 Skyrmion Interactions

Short range repulsions between skyrmions due to exchange-dominated deformations to their respective spin textures have already been theoretically and numerically discussed in the literature in the absence of magnetic dipole effects [24]. However, dense skyrmion populations are known to exhibit long range order leading to the formation of regular lattice structures [31, 16, 12] for which dipole interactions may play a relevant role. To capture the net sum of these effects on a single skyrmion's Thiele dynamics, we introduce a force term F_S in (7) which sums all the two-body interactions among skyrmions in a given ensemble (in the vein of [24]):

$$\mathbf{F}_S = \sum_{i,j} \mathbf{F}_{S-S}(\mathbf{d}_{ij}) \quad (8)$$

$$\mathbf{F}_{S-S}(\mathbf{d}) = \exp \left[-\frac{a_1 d^2 + a_2 d + a_3}{d + a_4} \right] \hat{\mathbf{d}} \quad (9)$$

where d_{ij} is the distance between particles i, j and $\hat{\mathbf{d}}$ the normalized distance vector. The specific exponential form was chosen such that the repulsion behaves gaussian-like at short range and scales like a simple exponential at distances greater than the typical skyrmion diameter. To fit the phenomenological parameters a_k (see Methods for values), we performed micromagnetic simulations far from boundaries where the net two-body skyrmion-skyrmion interaction in the presence of dipole effects can be isolated. Two skyrmions

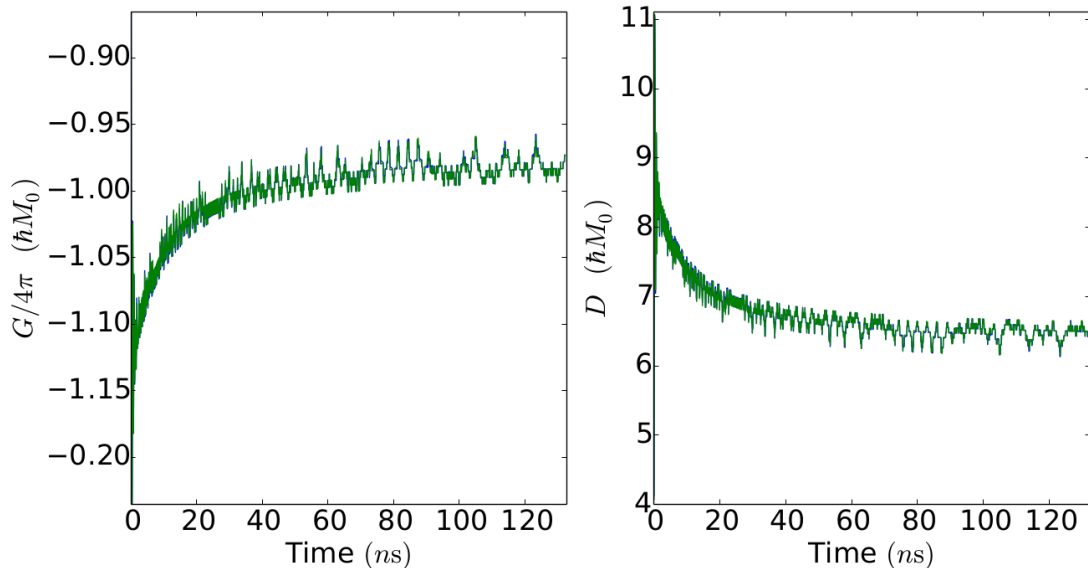


Figure 2: Two skyrmions, initially separated by 50 nm, are allowed to evolve, via micro-magnetic simulation, for 140 ns in the absence of thermal noise and applied currents. The topological constants are shown as a function of time. After a very brief relaxation phase, both the gyrovector G (left) and the dissipative dyadic D (right) stabilize around fixed values. Numerical deviations from constancy are due to the limited magnetic texture that was considered when performing integrals (3 and 4).

were initially set at a very close distance from each other and allowed to relax over time (see Methods for details).

In Figure 2, we plot the gyrotropic matrix elements obtained by using (3-4) from the evolving magnetic profiles. Both G and D are seen to quickly stabilize onto equilibrium values, with $G = -4\pi$ as expected from the skyrmion’s topological charge in the continuum limit [53]. Employing these values, the net repulsion force between the two particles was extracted by computing $\hat{\mathbf{G}} \cdot \hat{\mathbf{x}}$ (the left hand side of (1)) as the simulation progressed. This in turn allows for the exploration of how the net repulsion force scales with the inter-skyrmion distance. Figure 3 shows the particle trajectories (left) along with the extracted repulsion force as a function of inter-particle distance in units of skyrmion diameter (right). We find that the fit (9) is adequate in modeling the observed two-body.

2.3 Boundary Effects

Skyrmions are experimentally nucleated on finite geometries. As such, it is essential to account for how the particle dynamics may be affected by the

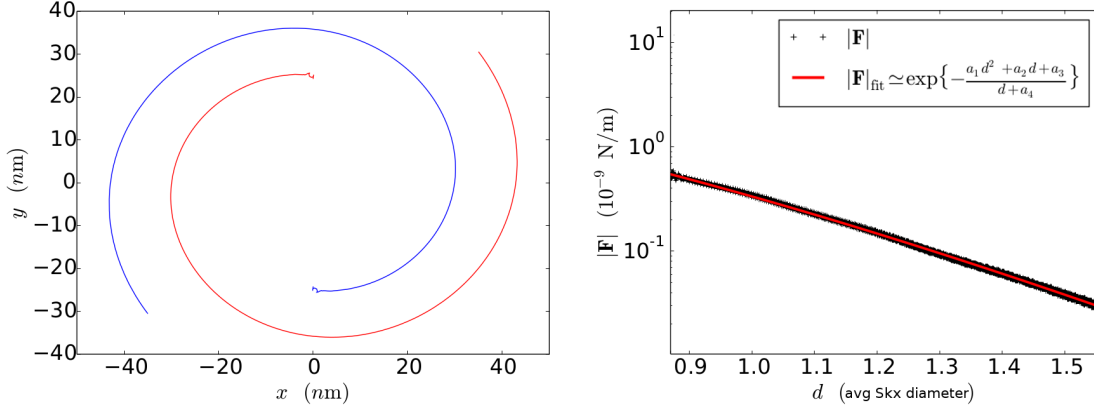


Figure 3: Two skyrmions, initially separated 50 nm , are allowed to evolve for 140 ns in the absence of thermal noise and applied currents. Their extracted trajectories (left) are employed to compute the inter-skyrmion repulsion force intensity (right), plotted as a function of distance in units of average skyrmion diameter ($\sim 60\text{ nm}$), which was then fit phenomenologically according to equation (9). Over the course of the simulation, the two skyrmions are seen to spiral away from each other as a direct consequence of the gyrotronic terms appearing in the Thiele-dynamical model.

geometry’s boundaries. The radial size of isolated skyrmions in magnetic dots is known to be confined by an explicit condition on the orientation of magnetic moments at the boundary [54, 3]. This effect, a direct result of DMI in the material, is also responsible for repelling skyrmions from boundaries guaranteeing the transport properties which make them so useful for applications [3, 20]. As skyrmions in rarefied ensembles (as opposed to lattices) are capable of moving about freely, their dynamics eventually lead them close enough to the sample boundary where their behavior must be quantified through the Thiele formalism.

We repeat our previous phenomenological analysis to model boundary effects by extracting the net force experienced by a solitary skyrmion initially placed adjacent to the boundary of a circular geometry. In Figure 4, the force experienced by the skyrmion results in a net drift both along and away from the dot’s boundary (left) whose scaling behavior as a function of distance from the boundary is distinctly different from that observed for skyrmion-skyrmion repulsions. In order to have an explicit phenomenological expression for the boundary repulsion force, we fit the observed data to a sextic gaussian form (see Methods):

$$|\mathbf{F}|_{\text{B}} \simeq \exp\left[-\sum_0^6 b_j d^j\right], \quad (10)$$

which is found to model the boundary interaction very well.

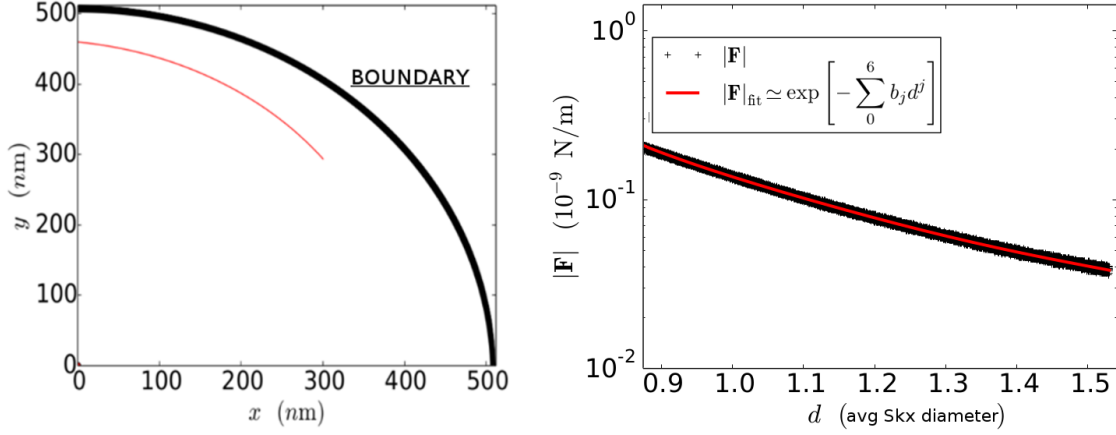


Figure 4: Net force experienced by a solitary skyrmion initially nucleated at a distance of $d = 50 \text{ nm}$ from the boundary of a 1024 nm -diameter circular geometry and allowed to evolve for $1 \mu\text{s}$. Over the course of the simulation, the skyrmion’s trajectory (left) is seen to move - clockwise - both along and away from the magnetic boundary (thick black curve) as a result of the gyrotropic effects captured by the Thiele-dynamical model. The red line (right) shows a fit to the numerically derived force as a function of the distance from the boundary in units of average skyrmion diameter.

2.4 Ensemble Dynamics

Having modeled both two-particle and boundary repulsions, we now proceed to verify the assumptions of our model. We repeat the same numerical procedures for larger skyrmion numbers to verify that effective forces perceived by single skyrmions can be reconducted to an n -body sum of individual two-particle repulsions plus a boundary interaction term. We simulate 30 skyrmions initially placed randomly inside a circular geometry and allowed them to evolve for 140 ns . In Figure 5 we again see how the gyrotropic matrix elements of each skyrmion are consistent (within a 10% margin of error) with those found for the two-particle simulation in Figure 2. In our particle treatment of the ensemble dynamics, we use identical Thiele parameters for every skyrmion as justified by the small error of our micromagnetically derived gyrotropic constants.

As discussed for the two- and one-particle studies of the previous sections, we reconstruct the net force experienced by each skyrmion from its trajectory and gyrotropic parameters. In Figure 6, the net force extracted from the simulated dynamics is compared to our phenomenological prediction (red curves) accounting for forces between skyrmions (8) but without considering the boundary interaction term (10). In Figure 7, on the other hand, the additional boundary term $\mathbf{F}_B$ is included to highlight its importance in modeling skyrmions in the vicinity of the boundary, resulting in a

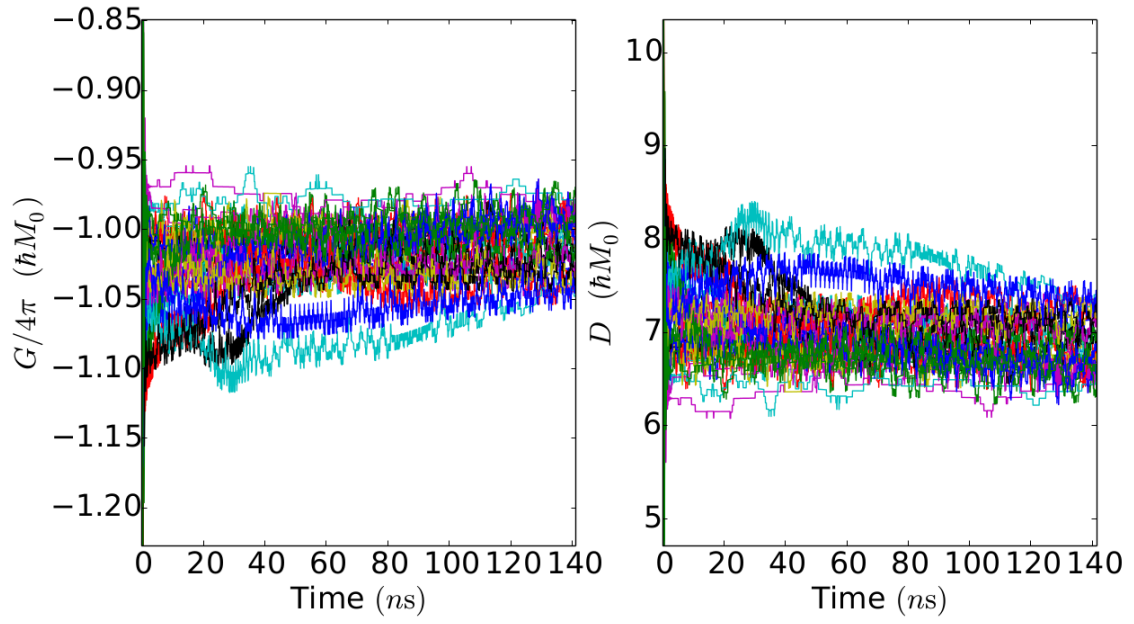


Figure 5: 30 skyrmions, initially placed randomly inside a 1024 nm-diameter circular geometry, are allowed to evolve for 140 ns in the absence of thermal noise and applied currents. The topological constants are shown as a function of time. After a very brief relaxation phase, both the gyrovector G (left) and the dissipative dyadic D (right) stabilize around fixed values. Numerical deviations from constancy are due to the limited magnetic texture that was considered when performing integrals (3 and 4).

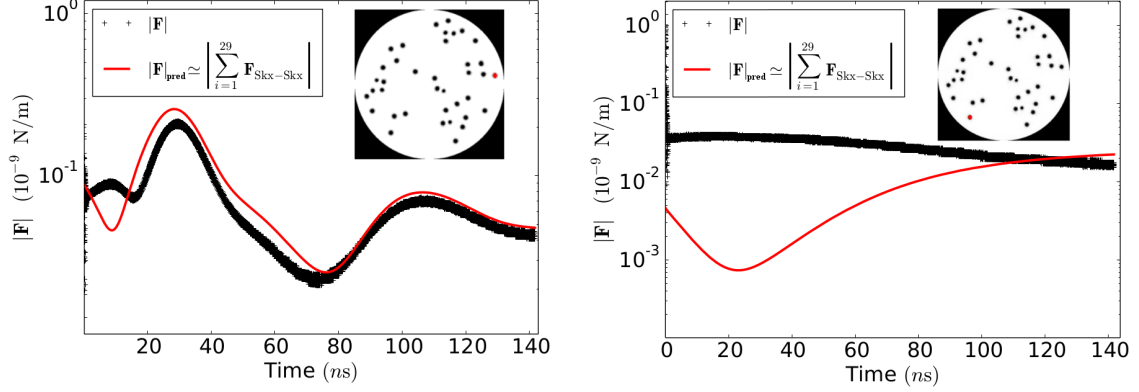


Figure 6: 30 skyrmions are initially placed randomly inside a 1024 nm-diameter circular geometry and allowed to evolve for 140ns in the absence of thermal noise and applied currents. Their extracted trajectories were then used, in conjunction with their extracted gyrotropic constants (see Figure 5 and eq. (1)), to compute the effective forces acting on each particle ($\mathbf{F}_{\text{Ext}} = \hat{\mathbf{G}}^\alpha \cdot \dot{\mathbf{x}}$). In the figure, the net forces acting on two such skyrmions are shown (identified by a red dot in each inset) and compared to the additive two-skyrmion prediction (8) in the absence of a boundary interaction term to exemplify the importance of all the effects discussed in the text.

much better fit. The skyrmions highlighted in red in these two figures were chosen to exemplify this. We now have all the tools necessary to efficiently model large ensembles of skyrmions in a device setting.

3 Skyrmion Reshuffler

Having evaluated the behavior of single skyrmions in a confined system and extracted the forces and topological parameters of interacting skyrmions as well as the influence of sample boundaries, the next step towards the implementation of bio-inspired skyrmion-based devices is to propose designs which can be tackled through our numerical framework. In this respect, we take inspiration from the general device structure described in Figure 1 and propose two applications of skyrmions in computing. Many other future devices employing the same principles as ours should be possible, as well as being numerically tractable via the modelling techniques just discussed.

3.1 Stochastic Computing

As feature sizes in semiconductor systems are scaled down to the point where their deterministic behavior cannot be guaranteed, the necessity of error-correcting codes [55] and hardware redundancies [56, 57] have become indispensable for reliable data processing. In this context, *stochastic computing*

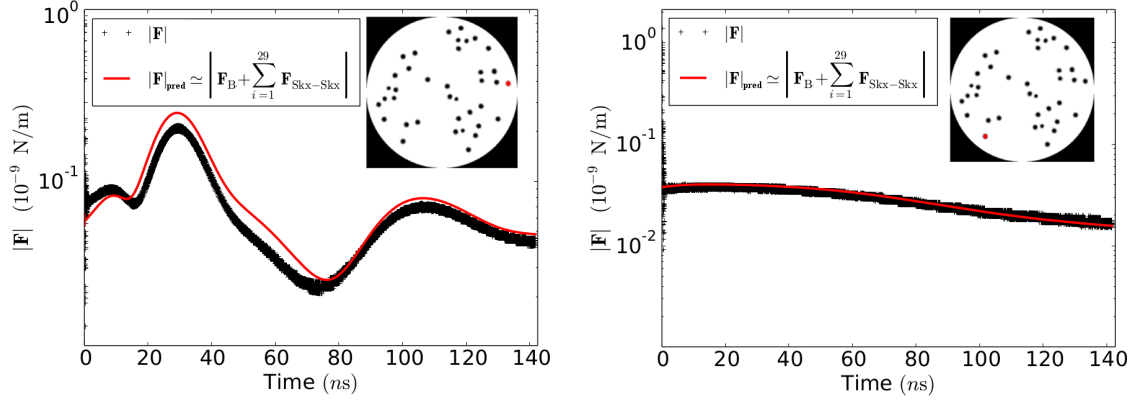


Figure 7: 30 skyrmions are initially placed randomly inside a 1024nm-diameter circular geometry and allowed to evolve for 140ns in the absence of thermal noise and applied currents. Their extracted trajectories were then used, in conjunction with their extracted gyrotropic constants (see Figure 5 and (1)), to compute the effective forces acting on each particle ($\mathbf{F}_{\text{Ext}} = \hat{\mathbf{G}}^\alpha \cdot \dot{\mathbf{x}}$). In the figure, the net forces acting on two such skyrmions are shown (identified by a red dot in each inset) and compared to the additive two-skyrmion prediction (8) plus boundary correction term (10).

seeks to embrace probabilistic computing elements to bypass these issues by achieving tremendous gains in signal processing efficiency at the cost of degradation in computational precision [58, 59, 60, 61, 62]. Instead of defining operations as precise bitwise manipulations of stored binary values, one instead aims to encode numerical values in the *p-value* (statistical ratio of up-time to signal length) of a random telegraph noise signal (or, alternatively a *bitstream* as in Fig. 8 [63]) and operate on such signals in physical time via cascaded logic gates to perform complex operations. Complex circuits have already been proposed to perform operations such as square-rooting [64], polynomial arithmetic [65, 66, 67], matrix operations [68] as well as the "tansig" transform function employed in neural-networks [69]. The output of such operations, inherently tolerant to faults in CMOS circuits such as *soft bit-flips* [70, 71]¹, will then also be a telegraph noise signal whose statistical properties can then be read out accordingly.

A very attractive property of stochastic computing is that it enables low-energy cost implementations of arithmetic operations using standard logic elements. As an example, consider the effect of feeding two telegraph noise signals with p-values p_A and p_B into an AND-gate (see Fig. 8a). The AND-gate's properties will produce an output signal with p-value $p_C = p_A \cdot p_B$,

¹Consider the act of randomly flipping one binary bit from a sequence of N bits (ex: 010001101 $\rightarrow$ 010011101). The binary number encoded changes drastically while the p-value encoded is altered only by a factor of $o(1/N)$.

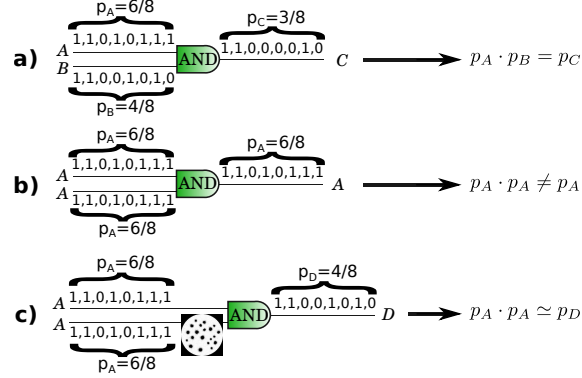


Figure 8: a) AND-gate implementation of the multiplication operation under the stochastic computing paradigm. The p-value of the output signal is equal to the product of the input signals' p-values. b) Whenever correlations exist between input signals, the AND-gate doesn't perform the expected multiplication. c) Forcing the input signals through a skyrmionic reshuffler allows correct multiplication operation even in the presence of strong correlations between the input signals.

thus implementing the stochastic computing equivalent of multiplication. Whereas the result of the multiplication is produced in real-time as the input signals are fed to the AND-gate, the accuracy of the result depends on how much of the output signal one wishes to sample. This trade-off of *speed vs accuracy* is central in the development of stochastic computing integrated circuits. A detailed description of the initial encoding and tuning of input telegraph noise p-values goes beyond the scope of this work. We note however that, aside from the traditional shift-register based techniques [72, 73], a compact and energy efficient approach for generating suitable stochastic signals can be achieved through current-biased superparamagnetic magnetic tunnel junctions [74, 75, 76]. This ties in well with the spintronics-based toolbox that can already be used for the nucleation and read-out of skyrmions [13, 14], thus allowing for the development of technologically consistent devices [77].

A major issue that has impeded the blossoming of stochastic computing is that cascading gates operating on random signals propagate unwanted correlations rapidly even after a few elementary operations [73, 78, 79, 80, 81, 62]. In Figure 8b, one can immediately see that by feeding two identical copies of the same input signal produces an output signal whose p-value does not represent a product in any way. It is therefore crucial to be able to regularly reshuffle the signals so that they stay uncorrelated. We call this element a stochastic reshuffler, capable of *copying* an input stream by producing an uncorrelated random stream coding for an identical p-value. By prefixing such devices to each gate in a circuit (see Fig. 8c), inconvenient correlations will be washed out effectively.

As of present, no efficient hardware stochastic reshufflers are known to exist. In CMOS, reshuffling signals can be done by combining a pseudo random number generator with a shift register or counter (both requiring long term memories) [82]. This means that each reshuffling operation has a large area imprint (a typical integrated shift-register has a linear size of $\sim 10 - 100 \mu\text{m}$), and consumes a lot of energy. It is therefore impossible to insert these reshufflers after each calculation stage in a stochastic computing circuit, preventing the realization of any large scale demonstration of stochastic computing on chip. In this section we propose a device capable of overcoming such crucial obstacles in stochastic computing.

3.2 Skyrmion Reshuffler Device

Our original concept of signal reshuffling device harnesses the diffusive dynamical nature of interacting skyrmions at finite temperature. First we demonstrate how a telegraph noise signal can be converted into a well-defined sequence of skyrmion particles injected into a given geometry. If the order of this sequence can then be altered enough by the thermal noise affecting skyrmion motion inside the geometry, the new skyrmion sequence codifies a new signal which will result uncorrelated from the original one. We claim that a device operating along these principles can be used to scalably solve the problem of propagating correlations in stochastic computing circuit designs.

The device (depicted in Figure 9) consists of multiple chambers - two are considered for simplicity - with input/output conduit tracks capable of ushering skyrmions into and out of the chambers. The net drift of skyrmions is achieved by a static current flowing across the entire structure from one conduit to another (see Methods). Skyrmions injected can be nucleated either singularly via injection of localized spin-currents with magnetic tunnel junctions (MTJ) [3], using in-plane spin-torques on a notch [23] or by rapid proliferation with appropriately constructed input conduit geometries [14, 83]. Each chamber's input/output track is provided with an injection/detection element.

The up and down states of the telegraph signal can in fact be thought of as two independent spike-trains (see Fig. 9) codifying the *up-to-down* and *down-to-up* transitions. We selectively nucleate skyrmions at a constant rate ($r_{\text{inj}} = 0.2$ nucleations/ns in the simulations presented here) onto the input conduit of one of the two chambers (UP and DOWN) depending on the last registered spike. Doing so generates a total population of N skyrmions proportional to the length τ_{input} of the input signal ($N = r_{\text{inj}}\tau_{\text{length}}$) and chamber populations $N_{\text{UP}} = pN$ and $N_{\text{DOWN}} = (1 - p)N$ given by the p -value of the input signal being codified. The current-induced drift then pushes the skyrmions across their respective chambers toward the output track where they will be detected. The sequence of outgoing skyrmions can

then decoded into an outgoing signal. Whenever an outgoing skyrmion is read-out from the UP(DOWN)-chamber we switch the outgoing signal into an *up* (*down*) state. As a result of this procedure, the output signal's length will be given by the time τ_{output} taken to read all the skyrmions and, by construction, its p-value will be identical to that of the input signal as long as the relative skyrmion particle numbers in the chambers are conserved.

Any accidental particle nucleation or annihilation taking place in the chambers will thus not influence the outgoing signal's p-value as long as its rate remains proportional to the total number of skyrmions present in each chamber. This proportionality is guaranteed for accidental particle annihilations as it will depend on how many skyrmions are present in the chamber at any given time. Nucleations on the other hand can be potentially problematic for the device's proper functioning. Luckily, the experimental observations of skyrmions at room temperature show no signs of thermally influenced skyrmion instabilities. This leaves the interactions with material defects and background inhomogeneities [84] as the only other potential source of skyrmion annihilations. As long as both chambers are similarly constructed, however, this will lead to a similar rate of annihilations in both chambers thus preserving input-to-output p-values modulo a possible decrease in the output signal's frequency. We now verify that these two effects are sufficient to reconstruct an uncorrelated output signal with identical p-value.

We simulate the device by considering two identical circular 1024 nm chambers into which we inject skyrmions every 50 ns from 100 nm -wide input conduits with currents of varying intensity (see Methods). After randomly generating a 0.5 ms -long telegraph noise signal, we inject skyrmions onto the chambers' input track as prescribed. After drifting and diffusing through their respective chambers, they are then *read* upon arriving at the output track and used to reconstruct an outgoing signal. The output signal's correlation to the input is then checked by computing the product-moment correlation coefficient of the two [85]:

$$\rho_{X,Y} = \frac{\text{cov}(X,Y)}{\sigma_X \sigma_Y}, \quad (11)$$

where $\text{cov}(X,Y)$ is the covariance of two signals X and Y while σ is their respective variance. We show this result in Figure 10 as a function of the drift current intensity.

If the chamber is significantly larger than the transverse size of the input/output conduit tracks, current densities inside the chamber may become small enough, allowing skyrmions to interact and diffuse thermally in the chambers before exiting. In Figure 10-right, the correlation coefficient ρ is in fact seen to decrease rapidly with lower current intensities. For the physical values considered, our device shows that strong decorrelation is achieved

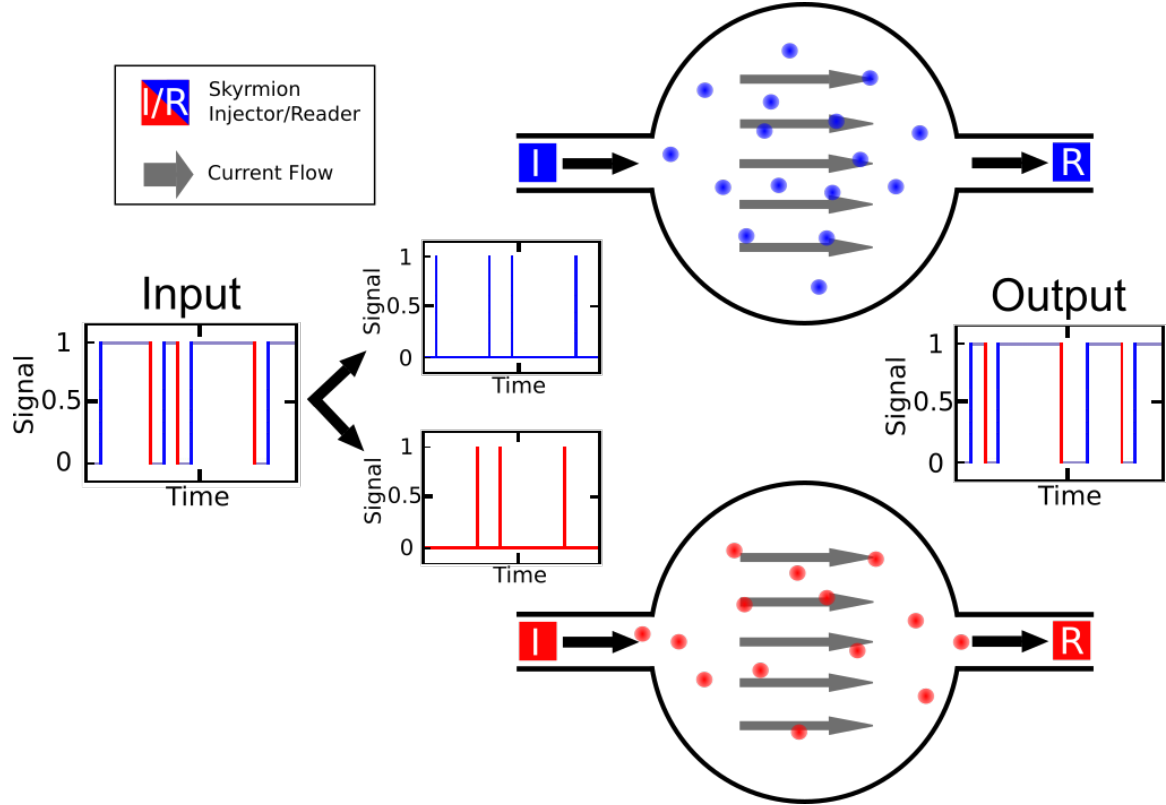


Figure 9: The proposed device consists of two magnetic chambers into which skyrmions are injected depending on the state of an input telegraph noise signal. The net drift of the skyrmion particles due to a constant current flow along with the thermal diffusion in the chambers leads to an exit order that can be significantly different from that of entry. This is employed to reconstruct a new outgoing signal with the same statistical properties as the first as well as being uncorrelated from it.

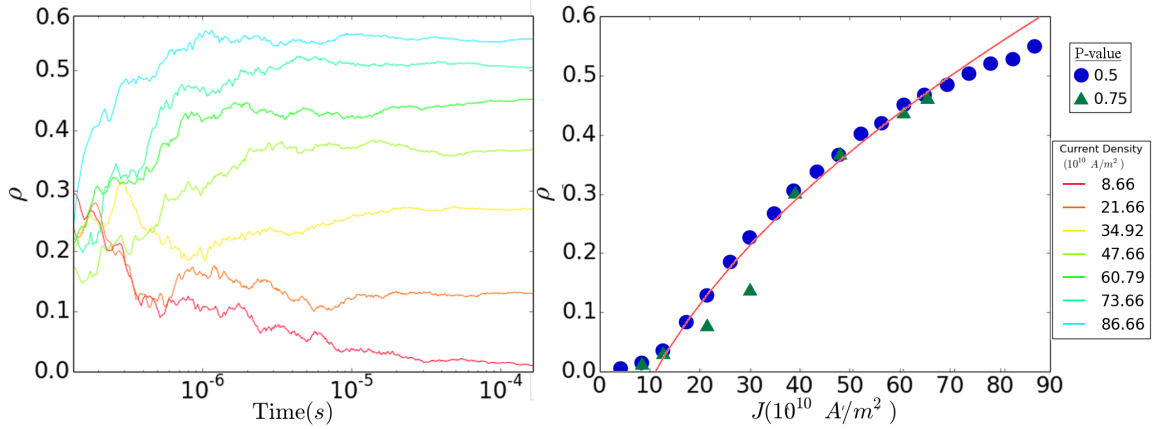


Figure 10: Simulation of the Skyrmion Reshuffler operating at a temperature of 300 K employing two identical chambers (1024 nm diameter) to scramble 0.5 ms -long, randomly generated, telegraph noise input streams for different current intensities as measured at the 100 nm -wide conduits. (Left) temporal evolution as the output stream is generated. (Right) final product-moment correlation coefficient at each current intensity for two different input p-values. The red curve fits data to the scaling $\rho = c_A + c_B\sqrt{J}$ argued in the discussion following (13).

for currents intensities of $\sim 10^{10}\text{ A/m}^2$ ². From the moment the output signal reconstruction commences, the correlation reaches its steady state value on a μs timescale as can be seen in Fig. 10-left by the flattening of the correlations' temporal traces. The time required to inject and read-out a statistically significant number of skyrmions determines the precise timescale for relaxation of correlations towards their steady-state equilibrium. This leads to the intuitive understanding that stronger currents allow the device to function faster at the cost of decorrelation efficiency. In turn, what exactly qualifies as 'satisfactory decorrelation' will ultimately depend on the details and specifications of the stochastic computing circuit one wishes to implement. Furthermore, we don't see significant deviation in the results as a function of the p-value assigned to the input signal. In Fig. 11 we instead fix the current intensity at $7 \cdot 10^{11}\text{ A/m}^2$ and allow for the chamber sizes to vary. Larger chambers allow the particle to diffuse for longer thus resulting in a better decorrelation of the shuffler's output signal. Ultimately, Figures 10 and 11 show how the degree of decorrelation achieved can be tuned by both lowering the current intensity and/or increasing the chamber sizes.

Ideally, one would like the signal scrambler to work as fast as possible. The speed at which a statistically significant output signal can be generated

²At the lower end of the sampled current intensity spectrum, no more than 44 particles were observed in either chamber at any given time. As we will see later on (see Figure 14), this number is well below the saturation limit of 90 for this chamber size.)

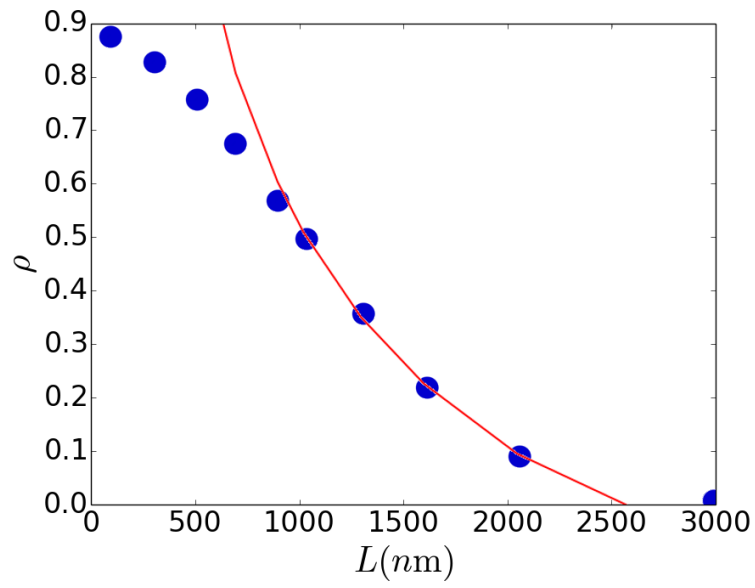


Figure 11: Output signal correlation as a function of different chamber sizes driven at a current intensity of $7 \cdot 10^{11} \text{ A/m}^2$. Increasing the chamber size results in a longer diffusion time of the particles inside the chamber leading to a better decorrelation of the output signal. The red curve fits data to the scaling $\rho = c_A + c_B/\sqrt{L}$ argued in the discussion following (13).

depends directly on the intensity of the driving current moving the injected skyrmions through the chambers (we neglect effects due to finite response times of nucleation and read-out mechanisms). However, as shown in Figure 10, higher currents lead to highly correlated output signals due to the fact that skyrmion particles do not spend enough time diffusing and interacting in the chambers. In Fig. 10-right we find 60% correlation at the highest driving current sampled ($9 \cdot 10^{11}$ A/m²).

Alternatively, one may try to increase the temperature in an attempt to amplify thermal diffusion. This, however, leads to both a higher energetic consumption as well as the potential for an increased skyrmion annihilation rate. Ultimately, the condition affecting this trade-off lies in the relative intensity of dynamical drift and thermal noise. From (6) one has that the skyrmion's thermal diffusion over time results in a dispersion given by:

$$\langle |\mathbf{x}|^2 \rangle(t) = 2 \frac{k_B T}{\gamma M} \left(\frac{\alpha D}{G^2 + (\alpha D)^2} \right) t, \quad (12)$$

where t is the elapsed time and angle brackets $\langle \cdot \rangle$ refer to averaging over noise.

Significant decorrelation between input and output signals takes place whenever this diffusion is large enough to allow scrambling in the sequence of skyrmions being injected into the chamber. Denote then by l_0 the relative spacing between successively injected skyrmions. If thermal effects manage to displace skyrmions more than their inter-spacing ($\langle |\mathbf{x}| \rangle \gg l_0$) over the time it takes them to cross the chamber, it is reasonable to expect the ingoing and outgoing sequences to become randomized relative to each other. As such, a qualitative estimate of the correlation between input and outgoing signals can be found in the ratio between these two length scales $\rho \propto l_0 / \sqrt{\langle |\mathbf{x}|^2 \rangle}$. Recalling then from (1) that the particle drift speed scales with the current intensity ($|\dot{\mathbf{x}}| \simeq \mathbf{v}_s \propto J$) one can expect that correlations will scale relative to system parameters as:

$$\rho \propto \frac{l_0}{\sqrt{\langle |\mathbf{x}|^2 \rangle(t_{\text{exit}})}} \propto l_0 \sqrt{\frac{\gamma M}{k_B} \left(\frac{G^2 + \alpha D^2}{\alpha D} \right) \frac{J}{LT}}, \quad (13)$$

where denoting the chamber diameter as L , the time taken to cross is $t_{\text{exit}} \simeq L/|\mathbf{v}_s| \propto L/J$. The red curves in Figures 10 and 11 indeed verify that the scalings $\rho \propto \sqrt{J}$ and $\rho \propto 1/\sqrt{L}$ correspond with our numerical data justifying how correlations will be lower for smaller currents and larger chamber sizes.

A potential improvement to the Skyrmion Reshuffler can theoretically be found in the use of anti-ferromagnetic (AFM) materials where the possibility of stabilizing AFM skyrmions has recently been suggested [86, 87, 88]. At the core, the main differences in the material parameters between AFM and FM devices lies in the sign of the exchange interaction and the magnitude

of the magnetostatic interaction. These differences have potentially large repercussions on the Thiele modeling of skyrmions in the AFM systems. The negative exchange interaction leads to a vanishing gyrovector $G = 0$, implying two important consequences. First, the AFM skyrmion always has zero transverse velocity relative to the direction of current flow. This, in FM skyrmions, is true exclusively in the singular scenario $\alpha = \eta$ ³. Secondly, and most importantly, a vanishing gyrovector implies a larger diffusion constant (6) and, consequently, smaller correlations (13). Depending on the value of the damping constant α in the materials employed ($\alpha \sim 0.01 - 1$), the difference in magnitude of the diffusion constant in FM and AFM skyrmions can easily span an order of magnitude difference. The magnitude of the magnetostatic interaction also complements the AFM skyrmion as it may lead to the stabilization of much smaller, and more thermally sensitive, particles. For all these reasons, one expects that AFM skyrmions would allow operation of our proposed device at higher currents and faster speeds.

Overall, given the DC-current driving the device, we expect the skyrmion reshuffler to operate at very low energies ($\sim \mu\text{W}$). A more accurate metric would involve calculating the energy cost per reshuffled *bit* of information being transmitted through the telegraph signal. Typical CMOS-based solutions reshuffle clocked stochastic bitstreams [82] whose energy consumption can be estimated at ~ 10 pJ/bit. Placing their large area imprint problems aside, they are expected to perform efficiently only for slow bitstreams as their energy consumption will scale linearly with the signal's frequency. On the other hand, our Skyrmion Reshuffler constant energy costs will prove ideal for reshuffling high frequency streams instead. As already mentioned, the device modeled in this section considered a constant skyrmion injection rate of 0.2 nucleations/ns thus allowing us to potentially reshuffle signals with frequencies as high as 5 GHz, resulting in an equivalent energy-per-bit cost of 5 fJ/bit which is orders of magnitude lower.

4 Skyrmion Neuron

We now turn to demonstrate how a similar design can be used to emulate the behavior of a neuron. Neural functioning relies on the ability to transmit and receive electrochemical signals to/from a large numbers of interconnected neurons by means of its *dendritic* connections (see Fig. 12). As coupled neurons spike, the receiving neuron registers the event with a voltage increase (or decrease) across its cellular membrane. The underlying physical mechanism for this behavior is the presence of ion channels scattered over the cell's membrane responsible for these potential differences. Such physical channels are not ideal however and *leak* over time resulting in a steady

³In fact, in the case of driving by spin-orbit torques from the heavy metals, you will always have a transverse velocity.

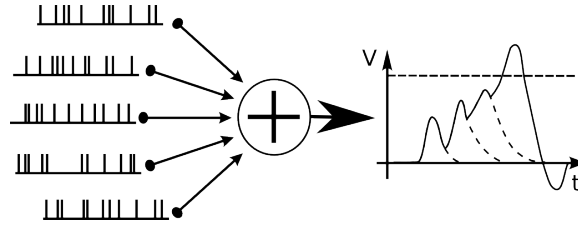


Figure 12: A neuron collects neuronal spiking activity from nearby neurons. The incoming spikes lead to an increasing voltage potential between the inside and outside of the receiving neuron. Once the potential difference reaches a certain threshold, the receiving neuron discharges by releasing a voltage spike to its axon terminals where the signal is transmitted through synapses to other neurons. Due to voltage leakage across the cell membrane, the neuron can be thought as a leaky capacitor with low breakdown voltage.

decay of the neuron's voltage towards its resting potential in the absence of incoming electrochemical pulses. As a result of this behavior, a neuron can be thought of as a leaky capacitor.

If incoming neuronal activity is registered at a high enough frequency, however, the receiving neuron overcomes its leaking voltage and steadily charge. A threshold potential exists beyond which the neuron suddenly discharges and resets. This basic model of neuronal functioning is known as the *leaky integrate-and-fire* neuron model [89, 90]. The neuron effectively serves as a basic memory integrating the sum of past voltage spikes received with the added property that this memory is lost over time if a potential threshold is not reached.

The analogies to our skyrmion reshuffler are already apparent as the injection of particles into it can be thought of as a response to a voltage spike train (shown in Fig. 9). In this sense, the collecting of skyrmions inside the chambers serves as a history of the input spike train. If the passage of skyrmions through the output conduit were to be precluded (such as with a voltage gate [32]), skyrmions progressively accumulate inside the geometry where their density can be estimated via a reading element placed inside each chamber (see Fig. 13). Each chamber can then be thought of as a reservoir collecting the memory of whatever input signal was employed to populate it.

Furthermore, an upper limit exists to how many skyrmions may be crammed into each such chamber. In fact, as skyrmions become compressed with their neighbors to length scales comparable to the typical skyrmion diameter, the combination of dipolar strain among particles along with thermal effects breaking topological stability may cause them to annihilate. The topological stability of the skyrmion profile is only guaranteed under continuous deformations of the magnetic texture [22, 91]. The introduction of a sufficiently large thermal field in the magnetization dynamics can make a skyrmion collapse with some probability [13, 92, 93, 94, 95, 96]. Alterna-

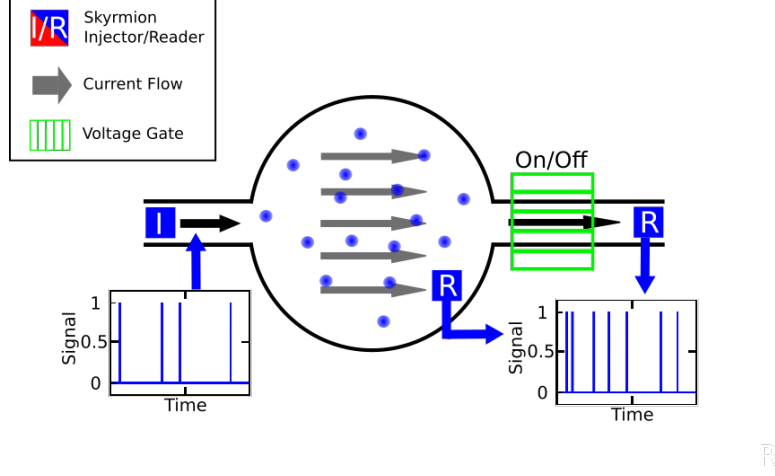


Figure 13: The Skyrmion Neuron consists of a magnetic chamber into which skyrmions are injected depending on the state of one or multiple input telegraph noise signals. A voltage gate, initially in an ON state, will impede the skyrmions from drifting to the output conduit thus leading to particle accumulation. A reading element placed inside the chamber can be used to estimate the skyrmion density inside the chamber and switch off the voltage gate when a critical density has been reached.

tively, and possibly more importantly, skyrmion annihilation can be biased by the presence of randomly scattered material defects in the magnetic sample populated by the skyrmions. As such, small room temperature skyrmions can potentially annihilate (and nucleate) simply due to thermal fluctuations and material disorders. The maximal particle density inside a chamber can hence be thought of as a saturation threshold beyond which memory of the input signal will certainly be destroyed.

In Fig. 14, we perform micromagnetic simulations at 300 K to establish the maximal number of $\sim 60\text{ nm}$ skyrmions which can be stabilized inside chambers of varying sizes. We nucleate the skyrmions randomly in the chamber in ever increasing numbers and allow the magnetic texture to stabilize for 2 ns before counting how many skyrmions are left. This process was then repeated ten times before computing the average. For each chamber size explored, a saturation value is found beyond which no more skyrmions can be added reliably into the geometry.

The combination of memory due to particle conservation and memory-loss from annihilations allows one to view our proposed skyrmionic chamber as a lossy memory storage device which integrates an incoming signal while allowing a certain decay of the accumulated information. Upon switching off the voltage gate, the collected skyrmions can be released into the output conduit whenever a certain threshold skyrmion density is reached (as measured by a reading element inside the chamber). Following these principles,

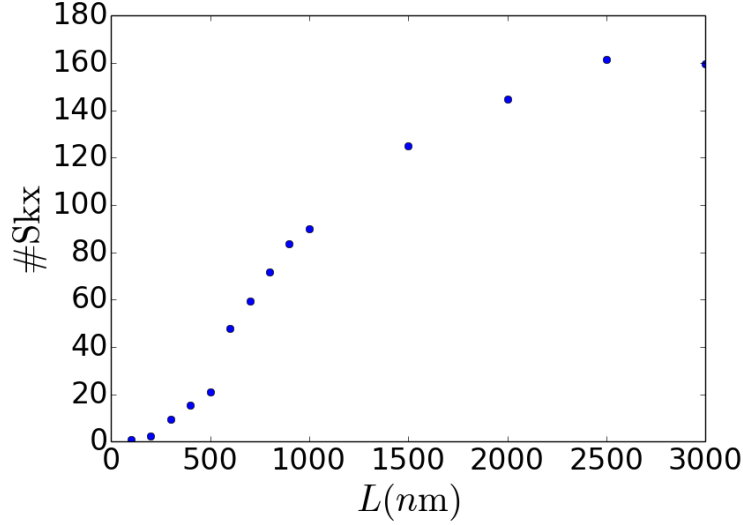


Figure 14: Maximum number of $\sim 60\text{ nm}$ skyrmions that can be stabilized in a circular chamber as a function of chamber size at 300 K .

the functioning of our device behaves as a leaky integrate-and-fire neuron where, instead of integrating discrete current pulses through electric potential accumulation before discharging, our device collects skyrmions instead and successively dumps them into the output conduit.

5 Conclusion

The impracticality of performing complex micromagnetic simulations out to long timescales currently poses an obstacle to the design and proof-of-concept of novel spintronic-based devices with a $\sim \mu\text{m}$ area imprint. Under suitable simplifying assumptions however, the behavior of solitonic magnetic spin-textures can be radically simplified and reduced to classical n -body problems which can be tackled through a plethora of numerical techniques. We have shown how one such *particle* model (the *Thiele* equation) can be phenomenologically tuned in such a way to account for complex exchange and dipole mediated interactions among stable magnetic skyrmions. By means of the tools developed, we proposed and modeled two skyrmion devices whose behavior would be computationally intractable via standard micromagnetic techniques.

The Skyrmion Reshuffler encodes a telegraph noise signal into a sequence of skyrmions injected and current-driven through two separate chambers. The dominance of thermal diffusion in each chamber scrambles the particle order in such a way that the output sequence can be used to reconstruct an

output signal with negligible correlations to the input one. Through simple scaling analyses, we have shown how the system parameters impact these correlations and balance the trade-offs between speed and effectiveness of the device’s operation. Leveraging the interplay between skyrmion particle stability and thermal diffusivity, we have argued that the skyrmion reshuffler stands to solve a long standing problem in the field of stochastic computing where computations defined over stochastic signals require correlations to be absent for proper functioning. The spintronic basis of the skyrmion reshuffler’s design allows for a highly attractive area imprint and energy costs.

The Skyrmion Neuron adapts the skyrmion reshuffler’s design to propose a device capable of emulating the integrate-and-fire characteristics of a neuron. By means of an added voltage gate selectively prohibiting the outflow of skyrmions from the chamber, as well as an extra read-out element *inside* the chamber, the skyrmion density in the chamber can be measured and the voltage gate released upon a certain threshold being reached. In doing so, the chamber integrates the signal intensity (or length) driving the input sequence of skyrmions injected into the chamber. To complete the analogy with the animal neuron, we argue that skyrmions perform the role of both voltage accumulation as well as neurotransmitters in this specific layout. The devices we propose are compatible with standard CMOS and can also be the building block of future fully spintronic probabilistic computers.

Overall, the sensitivity of magnetic soliton structures to small driving currents and thermal noise makes them optimal candidates for the development of novel probabilistic devices. Furthermore, the *nano*-scale size of these particles implicitly guarantees that devices employing them will be both energy efficient and scalable. Our results suggest that the basic research currently being done on these exotic magnetic solitons fertilizes the field for future disruptive applications to come.

6 Methods

The three-dimensional micromagnetic simulations were performed using the MuMax3 GPU-accelerated micromagnetic simulation program [97]. The average energy density contains the exchange energy, the anisotropy energy, the applied field (Zeeman) energy, the magnetostatic (demagnetization) energy and the DMI energy terms. In all simulations, the thickness of the magnetic nanotracks was 3 nm . The length of the input/output conduits was 50 nm , while the width was set to 100 nm . Magnetic parameters used in the simulations: saturation magnetization $M_S = 1400\text{ kA/m}$, exchange stiffness $A_{ex} = 27.5\text{ pJ/m}$, interface-induced DMI constant $D = 2.05\text{ mJ/m}^2$, perpendicular magnetic anisotropy constant $K_u = 1.45\text{ MJ/m}^3$ and gyromagnetic ratio $\gamma = -2.211 \cdot 10^5\text{ m/As}$ (consistent with interfacially stabilized skyrmions on Pt/Co/MgO nanostructures [17]). The Gilbert damping

coefficient α was set to 1. All models are discretized into tetragonal cells with the constant cell size of $2 \times 2 \times 3 \text{ nm}^3$ in the simulations, whose linear size is smaller than both the fundamental length scale $A_{ex}/D \simeq 13.4 \text{ nm}$ and the domain wall width $\sqrt{A_{ex}/K_u} \simeq 4.35 \text{ nm}$. With these parameters, we observed the stabilization of skyrmions with an average of diameter of $\sim 60 \text{ nm}$ both at zero and 300 K temperature. The integration time steps used were $5 \cdot 10^{-12} \text{ s}$ and $5 \cdot 10^{-14} \text{ s}$ at 0 K and 300 K respectively. At finite temperature breathing modes were observed at GHz frequencies.

The tracking of skyrmion particles was performed on dynamical snapshots taken at each time step using the python implementation of the DLIB open-source machine learning library [98]. The classic Histogram of Oriented Gradients (HOG) feature combined with the linear classifier, image pyramid, and sliding window detection scheme were used to train a detector to recognize skyrmions using a training set of 200 stabilized skyrmion profiles. From the geometry's total magnetization profile, the tracking scheme allowed us to obtain a set of regions containing each one skyrmion only.

The computation of the skyrmion center was performed by first fitting the magnetic profile of each region with a cubic spline interpolation and then finding the maximum z-component of the magnetization on the interpolated profile. The algorithm allows for a $\sim \text{pm}$ resolution of the skyrmion center. The gyrotropic parameters were computed by performing the relevant surface integrals on the interpolated profile of each skyrmion particle as discussed in equations (3) and (4).

The n -body Thiele dynamics were solved using a specialized GPU-accelerated CUDA/C++ solver developed by the authors. The stochastic dynamical system of equations was solved employing a Heun scheme ensuring convergence to the proper Stratonovich solution. The current density distributions were first obtained by simulating current flow on COMSOL [99] for the geometry discussed. Room temperature skyrmions are known to exhibit breathing modes [48], these will however not impact the net dynamics due to the gyrotropic terms being scale-free in the particle size [47] since the skyrmion size is much larger than the domain wall width $\sqrt{A_{ex}/K_u} \simeq 4.35 \text{ nm}$. Qualitatively different dynamical behavior can however be expected for large skyrmions where an extra mass term is expected to play a role in the Thiele-description. For the material parameters in question, the numerical fitting constants for the skyrmion-skyrmion two-body repulsions were found to be $\mathbf{a} \simeq [6.94, -1.07, -2.59, 2.0]$, whereas the fitting constants for boundary repulsions were $\mathbf{b} \simeq [10.47, -65.05, 160.46, -197.63, 124.80, -31.05]$. In this work, we have taken $\eta = \alpha$ and $\mu = 1$ for convenience.

Acknowledgments

This work was funded by the European FET OPEN ‘*Bambi*’ project 618024 and the European Research Council ERC grant ‘*bioSPINspired*’ 682955. J.V.K and V.C acknowledge FET OPEN ‘*MAGicSky*’ project 665095.

References

- [1] Albert Fert, Vincent Cros, and João Sampaio. Skyrmions on the track. *Nature nanotechnology*, 8(3):152–156, 2013.
- [2] Naoto Nagaosa and Yoshinori Tokura. Topological properties and dynamics of magnetic skyrmions. *Nature nanotechnology*, 8(12):899–911, 2013.
- [3] J Sampaio, V Cros, S Rohart, A Thiaville, and A Fert. Nucleation, stability and current-induced motion of isolated magnetic skyrmions in nanostructures. *Nature nanotechnology*, 8(11):839–844, 2013.
- [4] Junichi Iwasaki, Masahito Mochizuki, and Naoto Nagaosa. Universal current-velocity relation of skyrmion motion in chiral magnets. *Nature communications*, 4:1463, 2013.
- [5] Xichao Zhang, Motohiko Ezawa, and Yan Zhou. Magnetic skyrmion logic gates: conversion, duplication and merging of skyrmions. *Scientific Reports*, 5:9400, 2015.
- [6] Wataru Koshibae, Yoshio Kaneko, Junichi Iwasaki, Masashi Kawasaki, Yoshinori Tokura, and Naoto Nagaosa. Memory functions of magnetic skyrmions. *Japanese Journal of Applied Physics*, 54(5):053001, 2015.
- [7] A Neubauer, C Pfleiderer, B Binz, A Rosch, R Ritz, PG Niklowitz, and P Böni. Topological hall effect in the a phase of mnsi. *Physical review letters*, 102(18):186602, 2009.
- [8] C Pappas, E Lelievre-Berna, P Falus, PM Bentley, E Moskvina, S Grigoriev, P Fouquet, and B Farago. Chiral paramagnetic skyrmion-like phase in mnsi. *Physical review letters*, 102(19):197202, 2009.
- [9] Akira Tonomura, Xiuzhen Yu, Keiichi Yanagisawa, Tsuyoshi Matsuda, Yoshinori Onose, Naoya Kanazawa, Hyun Soon Park, and Yoshinori Tokura. Real-space observation of skyrmion lattice in helimagnet mnsi thin samples. *Nano letters*, 12(3):1673–1677, 2012.
- [10] XZ Yu, Y Onose, N Kanazawa, JH Park, JH Han, Y Matsui, N Nagaosa, and Y Tokura. Real-space observation of a two-dimensional skyrmion crystal. *Nature*, 465(7300):901–904, 2010.

- [11] SX Huang and CL Chien. Extended skyrmion phase in epitaxial fege (111) thin films. *Physical review letters*, 108(26):267201, 2012.
- [12] Stefan Heinze, Kirsten Von Bergmann, Matthias Menzel, Jens Brede, André Kubetzka, Roland Wiesendanger, Gustav Bihlmayer, and Stefan Blügel. Spontaneous atomic-scale magnetic skyrmion lattice in two dimensions. *Nature Physics*, 7(9):713–718, 2011.
- [13] Niklas Romming, Christian Hanneken, Matthias Menzel, Jessica E Bickel, Boris Wolter, Kirsten von Bergmann, André Kubetzka, and Roland Wiesendanger. Writing and deleting single magnetic skyrmions. *Science*, 341(6146):636–639, 2013.
- [14] Wanjun Jiang, Pramey Upadhyaya, Wei Zhang, Guoqiang Yu, M Benjamin Jungfleisch, Frank Y Fradin, John E Pearson, Yaroslav Tserkovnyak, Kang L Wang, Olle Heinonen, et al. Blowing magnetic skyrmion bubbles. *Science*, 349(6245):283–286, 2015.
- [15] C Moreau-Luchaire, C Moutafis, N Reyren, J Sampaio, CAF Vaz, N Van Horne, K Bouzehouane, K Garcia, C Deranlot, P Warnicke, et al. Additive interfacial chiral interaction in multilayers for stabilization of small individual skyrmions at room temperature. *Nature nanotechnology*, 11(5):444–448, 2016.
- [16] Seonghoon Woo, Kai Litzius, Benjamin Krüger, Mi-Young Im, Lucas Caretta, Kornel Richter, Maxwell Mann, Andrea Krone, Robert M Reeve, Markus Weigand, et al. Observation of room-temperature magnetic skyrmions and their current-driven dynamics in ultrathin metallic ferromagnets. *Nature materials*, 2016.
- [17] Olivier Boulle, Jan Vogel, Hongxin Yang, Stefania Pizzini, Dayane de Souza Chaves, Andrea Locatelli, Tevfik Onur Menteş, Alessandro Sala, Liliana D Buda-Prejbeanu, Olivier Klein, et al. Room-temperature chiral magnetic skyrmions in ultrathin magnetic nanostructures. *Nature nanotechnology*, 11(5):449–454, 2016.
- [18] F Jonietz, S Mühlbauer, C Pfleiderer, A Neubauer, W Münzer, A Bauer, T Adams, R Georgii, P Böni, RA Duine, et al. Spin transfer torques in mnsi at ultralow current densities. *Science*, 330(6011):1648–1651, 2010.
- [19] XZ Yu, N Kanazawa, WZ Zhang, T Nagai, T Hara, K Kimoto, Y Matsui, Y Onose, and Y Tokura. Skyrmion flow near room temperature in an ultralow current density. *Nature communications*, 3:988, 2012.
- [20] Wanjun Jiang, Xichao Zhang, Guoqiang Yu, Wei Zhang, M Benjamin Jungfleisch, John E Pearson, Olle Heinonen, Kang L Wang, Yan Zhou, Axel Hoffmann, et al. Direct observation of the skyrmion hall effect. *arXiv preprint arXiv:1603.07393*, 2016.

- [21] Ales Hrabec, Joao Sampaio, Mohamed Belmeguenai, Isabell Gross, Raphael Weil, Salim Mourad Chérif, Andrei Stachkevitch, Vincent Jacques, Andre Thiaville, and Stanislas Rohart. Current-induced skyrmion generation and dynamics in symmetric bilayers. *arXiv preprint arXiv:1611.00647*, 2016.
- [22] AN Bogdanov and UK Rößler. Chiral symmetry breaking in magnetic thin films and multilayers. *Physical review letters*, 87(3):037203, 2001.
- [23] Junichi Iwasaki, Masahito Mochizuki, and Naoto Nagaosa. Current-induced skyrmion dynamics in constricted geometries. *Nature nanotechnology*, 8(10):742–747, 2013.
- [24] Shi-Zeng Lin, Charles Reichhardt, Cristian D Batista, and Avadh Saxena. Particle model for skyrmions in metallic chiral magnets: Dynamics, pinning, and creep. *Physical Review B*, 87(21):214419, 2013.
- [25] C Reichhardt, D Ray, and CJ Olson Reichhardt. Collective transport properties of driven skyrmions with random disorder. *Physical review letters*, 114(21):217202, 2015.
- [26] Jan Müller and Achim Rosch. Capturing of a magnetic skyrmion with a hole. *Physical Review B*, 91(5):054410, 2015.
- [27] Xichao Zhang, GP Zhao, Hans Fangohr, J Ping Liu, WX Xia, J Xia, and FJ Morvan. Skyrmion-skyrmion and skyrmion-edge repulsions in skyrmion-based racetrack memory. *Scientific Reports*, 5(7643), 2015.
- [28] Youngbin Tchoe and Jung Hoon Han. Skyrmion generation by current. *Physical Review B*, 85(17):174416, 2012.
- [29] Yan Zhou and Motohiko Ezawa. A reversible conversion between a skyrmion and a domain-wall pair in a junction geometry. *Nature communications*, 5, 2014.
- [30] R Tomasello, E Martinez, R Zivieri, L Torres, M Carpentieri, and G Finocchio. A strategy for the design of skyrmion racetrack memories. *Scientific Reports*, 4:6784, 2014.
- [31] S Mühlbauer, B Binz, F Jonietz, C Pfleiderer, A Rosch, A Neubauer, R Georgii, and P Böni. Skyrmion lattice in a chiral magnet. *Science*, 323(5916):915–919, 2009.
- [32] W Kang, Y Huang, C Zheng, W Lv, N Lei, Y Zhang, X Zhang, Y Zhou, and W Zhao. Voltage controlled magnetic skyrmion motion for racetrack memory. *Scientific Reports*, 6:23164, 2016.

- [33] Xichao Zhang, Yan Zhou, Motohiko Ezawa, GP Zhao, and Weisheng Zhao. Magnetic skyrmion transistor: skyrmion motion in a voltage-gated nanotrack. *Scientific Reports*, 5, 2015.
- [34] Yangqi Huang, Wang Kang, Xichao Zhang, Yan Zhou, and Weisheng Zhao. Magnetic skyrmion-based synaptic devices. *Nanotechnology*, 28(8):08LT02, 2017.
- [35] Jacques E Miltat and Michael J Donahue. Numerical micromagnetics: Finite difference methods. *Handbook of magnetism and advanced magnetic materials*, 2007.
- [36] Gordon D Smith. *Numerical solution of partial differential equations: finite difference methods*. Oxford university press, 1985.
- [37] IA Basheer and M Hajmeer. Artificial neural networks: fundamentals, computing, design, and application. *Journal of microbiological methods*, 43(1):3–31, 2000.
- [38] David Colliaux, Pierre Bessière, and Jacques Droulez. Cell signaling as a probabilistic computer. *International Journal of Approximate Reasoning*, 2016.
- [39] John Von Neumann and Ray Kurzweil. *The computer and the brain*. Yale University Press, 2012.
- [40] AA Thiele. Steady-state motion of magnetic domains. *Physical Review Letters*, 30(6):230, 1973.
- [41] Anthony N Burkitt. A review of the integrate-and-fire neuron model: I. homogeneous synaptic input. *Biological cybernetics*, 95(1):1–19, 2006.
- [42] Karin Everschor, Markus Garst, RA Duine, and Achim Rosch. Current-induced rotational torques in the skyrmion lattice phase of chiral magnets. *Physical Review B*, 84(6):064401, 2011.
- [43] DJ Clarke, OA Tretiakov, G-W Chern, Ya B Bazaliy, and O Tchernyshyov. Dynamics of a vortex domain wall in a magnetic nanostrip: Application of the collective-coordinate approach. *Physical Review B*, 78(13):134412, 2008.
- [44] OA Tretiakov and O Tchernyshyov. Vortices in thin ferromagnetic films and the skyrmion number. *Physical Review B*, 75(1):012408, 2007.
- [45] IA Ado, Oleg A Tretiakov, and M Titov. Microscopic theory of spin-orbit torques applied to skyrmion dynamics. *arXiv preprint arXiv:1603.07994*, 2016.

- [46] Erlend G Tveten, Alireza Qaiumzadeh, OA Tretiakov, and Arne Brataas. Staggered dynamics in antiferromagnets by collective coordinates. *Physical review letters*, 110(12):127208, 2013.
- [47] Christoph Schütte, Junichi Iwasaki, Achim Rosch, and Naoto Nagaosa. Inertia, diffusion, and dynamics of a driven skyrmion. *Physical Review B*, 90(17):174434, 2014.
- [48] Joo-Von Kim, Felipe Garcia-Sanchez, Joao Sampaio, Constance Moreau-Luchaire, Vincent Cros, and Albert Fert. Breathing modes of confined skyrmions in ultrathin magnetic dots. *Physical Review B*, 90(6):064410, 2014.
- [49] Felix Büttner, C Moutafis, M Schneider, B Krüger, CM Günther, J Geilhufe, C v Korff Schmising, J Mohanty, B Pfau, S Schaffert, et al. Dynamics and inertia of skyrmionic spin structures. *Nature Physics*, 11(3):225–228, 2015.
- [50] Gen Tatara, Hiroshi Kohno, and Junya Shibata. Microscopic approach to current-driven domain wall dynamics. *Physics Reports*, 468(6):213–301, 2008.
- [51] T Schulz, R Ritz, A Bauer, M Halder, M Wagner, C Franz, C Pfeleiderer, K Everschor, M Garst, and A Rosch. Emergent electrodynamics of skyrmions in a chiral magnet. *Nature Physics*, 8(4):301–304, 2012.
- [52] FG Mertens, AR Bishop, PL Christiansen, MP Soerensen, and AC Scott. Nonlinear science at the dawn of the 21th century. *by PL Christiansen, MP Soerensen, Scott AC Berlin: Springer*, 2000.
- [53] Ramamurti Rajaraman. *Solitons and instantons*. Elsevier Science B.V., 1982.
- [54] S Rohart and A Thiaville. Skyrmion confinement in ultrathin film nanostructures in the presence of dzyaloshinskii-moriya interaction. *Physical Review B*, 88(18):184422, 2013.
- [55] TRN Rao. Error coding for arithmetic processors. *New York: Academic*, 1974.
- [56] Brian Pratt, Michael Caffrey, James F Carroll, Paul Graham, Keith Morgan, and Michael Wirthlin. Fine-grain seu mitigation for fpgas using partial tmr. *IEEE Transactions on Nuclear Science*, 55(4):2274–2280, 2008.
- [57] Israel Koren and C Mani Krishna. *Fault-tolerant systems*. Morgan Kaufmann, 2010.

- [58] Brian R Gaines. Stochastic computing. In *Proceedings of the April 18-20, 1967, spring joint computer conference*, pages 149–156. ACM, 1967.
- [59] Armin Alaghi and John P Hayes. Survey of stochastic computing. *ACM Transactions on Embedded computing systems (TECS)*, 12(2s):92, 2013.
- [60] Antoni Morro, Vincent Canals, Antoni Oliver, Miquel L Alomar, and Josep L Rossello. Ultra-fast data-mining hardware architecture based on stochastic computing. *PloS one*, 10(5):e0124176, 2015.
- [61] Vincent Canals, Antoni Morro, Antoni Oliver, Miquel L Alomar, and Josep L Rosselló. A new stochastic computing methodology for efficient neural network implementation. *IEEE transactions on neural networks and learning systems*, 27(3):551–564, 2016.
- [62] Joseph S Friedman, Laurie E Calvet, Pierre Bessière, Jacques Droulez, and Damien Querlioz. Bayesian inference with muller c-elements. *IEEE Transactions on Circuits and Systems I: Regular Papers*, 63(6):895–904, 2016.
- [63] John Von Neumann. Probabilistic logics and the synthesis of reliable organisms from unreliable components. *Automata studies*, 34:43–98, 1956.
- [64] SL Toral, JM Quero, and LG Franquelo. Stochastic pulse coded arithmetic. In *Circuits and Systems, 2000. Proceedings. ISCAS 2000 Geneva. The 2000 IEEE International Symposium on*, volume 1, pages 599–602. IEEE, 2000.
- [65] Weikang Qian and Marc D Riedel. The synthesis of robust polynomial arithmetic with stochastic logic. In *Design Automation Conference, 2008. DAC 2008. 45th ACM/IEEE*, pages 648–653. IEEE, 2008.
- [66] Xin Li, Weikang Qian, Marc D Riedel, Kia Bazargan, and David J Lilja. A reconfigurable stochastic architecture for highly reliable computing. In *Proceedings of the 19th ACM Great Lakes symposium on VLSI*, pages 315–320. ACM, 2009.
- [67] Weikang Qian, Xin Li, Marc D Riedel, Kia Bazargan, and David J Lilja. An architecture for fault-tolerant computation with stochastic logic. *IEEE Transactions on Computers*, 60(1):93–105, 2011.
- [68] P Mars and HR McLean. High-speed matrix inversion by stochastic computer. *Electronics Letters*, 18(12):457–459, 1976.
- [69] Da Zhang and Hui Li. A stochastic-based fpga controller for an induction motor drive with integrated neural network algorithms. *IEEE Transactions on Industrial Electronics*, 55(2):551–561, 2008.

- [70] Robert C Baumann. Radiation-induced soft errors in advanced semiconductor technologies. *IEEE Transactions on Device and materials reliability*, 5(3):305–316, 2005.
- [71] Megha Parhi, Marc D Riedel, and Keshab K Parhi. Effect of bit-level correlation in stochastic computing. In *2015 IEEE International Conference on Digital Signal Processing (DSP)*, pages 463–467. IEEE, 2015.
- [72] Solomon W Golomb et al. *Shift register sequences*. Aegean Park Press, 1982.
- [73] PK Gupta and R Kumaresan. Binary multiplication with pn sequences. *IEEE Transactions on Acoustics, Speech, and Signal Processing*, 36(4):603–606, 1988.
- [74] Jun Ohta, Takashi Tokuda, Keiichiro Kagawa, Yasuo Terasawa, Motoki Ozawa, Takashi Fujikado, and Yasuo Tano. Large-scale integration-based stimulus electrodes for retinal prosthesis. In *Artificial Sight*, pages 151–168. Springer, 2007.
- [75] Nicolas Locatelli, Alice Mizrahi, A Accioly, Rie Matsumoto, Akio Fukushima, Hitoshi Kubota, Shinji Yuasa, Vincent Cros, Luis Gustavo Pereira, Damien Querlioz, et al. Noise-enhanced synchronization of stochastic magnetic oscillators. *Physical Review Applied*, 2(3):034009, 2014.
- [76] Robert Perricone, Yang Liu, Aaron Dingler, X Sharon Hu, and Michael Niemier. Design of stochastic computing circuits using nanomagnetic logic. *IEEE Transactions on Nanotechnology*, 15(2):179–187, 2016.
- [77] Rangharajan Venkatesan, Swagath Venkataramani, Xuanyao Fong, Kaushik Roy, and Anand Raghunathan. Spintastic: spin-based stochastic logic for energy-efficient computing. In *2015 Design, Automation & Test in Europe Conference & Exhibition (DATE)*, pages 1575–1578. IEEE, 2015.
- [78] Peter Jeavons, David A. Cohen, and John Shawe-Taylor. Generating binary sequences for stochastic computing. *IEEE Transactions on Information Theory*, 40(3):716–720, 1994.
- [79] Armin Alaghi and John P Hayes. Exploiting correlation in stochastic circuit design. In *2013 IEEE 31st International Conference on Computer Design (ICCD)*, pages 39–46. IEEE, 2013.
- [80] Bert Moons and Marian Verhelst. Energy-efficiency and accuracy of stochastic computing circuits in emerging technologies. *IEEE Journal on Emerging and Selected Topics in Circuits and Systems*, 4(4):475–486, 2014.

- [81] Rajit Manohar. Comparing stochastic and deterministic computing. *IEEE Computer Architecture Letters*, 14(2):119–122, 2015.
- [82] Saeed Sharifi Tehrani, Chris Winstead, Warren J Gross, Shie Manor, Sheryl L Howard, and Vincent C Gaudet. Relaxation dynamics in stochastic iterative decoders. *IEEE Transactions on Signal Processing*, 58(11):5955–5961, 2010.
- [83] Guoqiang Yu, Pramey Upadhyaya, Qiming Shao, Hao Wu, Gen Yin, Xiang Li, Congli He, Wanjun Jiang, Xiufeng Han, Pedram Khalili Amiri, et al. Room-temperature skyrmion shift device for memory application. *Nano Letters*, 17(1):261–268, 2016.
- [84] Mirko Baćani, Miguel A Marioni, Johannes Schwenk, and Hans J Hug. How to measure the local dzyaloshinskii moriya interaction in skyrmion thin film multilayers. *arXiv preprint arXiv:1609.01615*, 2016.
- [85] Ronald A Fisher. Frequency distribution of the values of the correlation coefficient in samples from an indefinitely large population. *Biometrika*, 10(4):507–521, 1915.
- [86] Joseph Barker and Oleg A Tretiakov. Static and dynamical properties of antiferromagnetic skyrmions in the presence of applied current and temperature. *Physical Review Letters*, 116(14):147203, 2016.
- [87] Xichao Zhang, Yan Zhou, and Motohiko Ezawa. Antiferromagnetic skyrmion: Stability, creation and manipulation. *Scientific Reports*, 6, 2016.
- [88] Chendong Jin, Chengkun Song, Jianbo Wang, and Qingfang Liu. Dynamics of antiferromagnetic skyrmion driven by the spin hall effect. *Applied Physics Letters*, 109(18):182404, 2016.
- [89] Alan L Hodgkin and Andrew F Huxley. A quantitative description of membrane current and its application to conduction and excitation in nerve. *The Journal of physiology*, 117(4):500, 1952.
- [90] Christof Koch and Idan Segev. *Methods in neuronal modeling: from ions to networks*. MIT press, 1998.
- [91] UK Rößler, AN Bogdanov, and C Pfeiderer. Spontaneous skyrmion ground states in magnetic metals. *Nature*, 442(7104):797–801, 2006.
- [92] Wataru Koshibae and Naoto Nagaosa. Creation of skyrmions and anti-skyrmions by local heating. *Nature communications*, 5, 2014.
- [93] J Hagemeister, N Romming, K von Bergmann, EY Vedmedenko, and R Wiesendanger. Stability of single skyrmionic bits. *Nature communications*, 6, 2015.

- [94] A Siemens, Y Zhang, J Hagemeister, EY Vedmedenko, and R Wiesendanger. Minimal radius of magnetic skyrmions: statics and dynamics. *New Journal of Physics*, 18(4):045021, 2016.
- [95] Hiroshi Oike, Akiko Kikkawa, Naoya Kanazawa, Yasujiro Taguchi, Masashi Kawasaki, Yoshinori Tokura, and Fumitaka Kagawa. Interplay between topological and thermodynamic stability in a metastable magnetic skyrmion lattice. *Nature Physics*, 12(1):62–66, 2016.
- [96] Gen Yin, Yufan Li, Lingyao Kong, Roger K Lake, Chia-Ling Chien, and Jiadong Zang. Topological charge analysis of ultrafast single skyrmion creation. *Physical Review B*, 93(17):174403, 2016.
- [97] Arne Vansteenkiste, Jonathan Leliaert, Mykola Dvornik, Mathias Helsen, Felipe Garcia-Sanchez, and Bartel Van Waeyenberge. The design and verification of mumax3. *Aip Advances*, 4(10):107133, 2014.
- [98] Davis E King. Dlib-ml: A machine learning toolkit. *Journal of Machine Learning Research*, 10(Jul):1755–1758, 2009.
- [99] COMSOL Multiphysics. Comsol multiphysics user guide (version 4.3 a). *COMSOL, AB*, pages 39–40, 2012.